ELEO

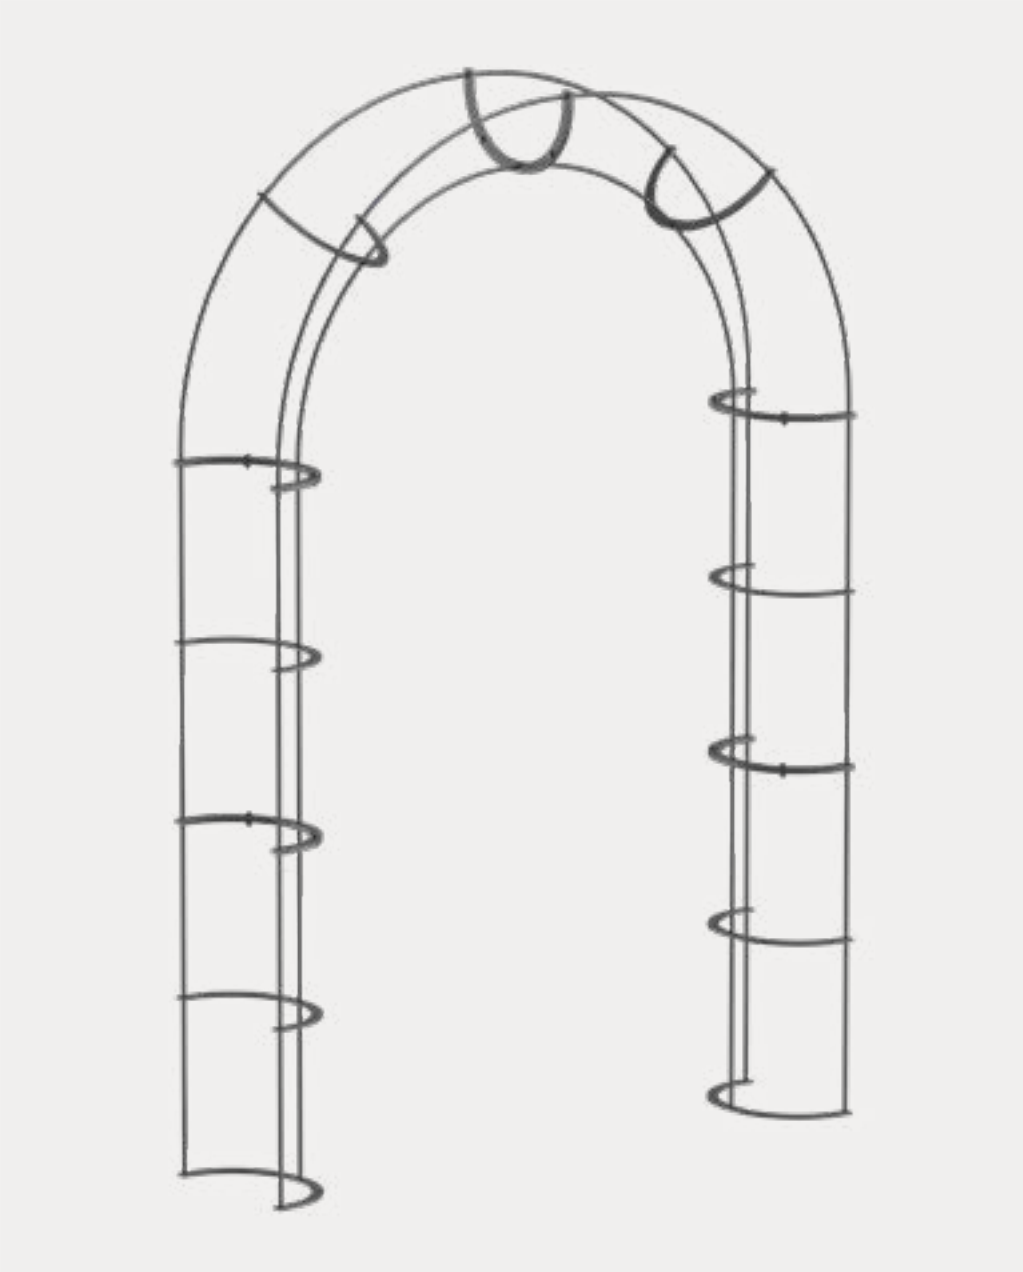

Assembly instructions for Caserta rose arch

THANK YOU FOR CHOOSING AN ELEO 'CASERTA' ROSE ARCH. WE ARE HAPPY TO ASSIST YOU WITH THE FOLLOWING INSTRUCTIONS FOR ASSEMBLING YOUR NEW ROSE ARCH.

What's included:

2x elements A 'bottom'
2x elements B 'center'
2x elements C 'top'
10x screws M8 25 mm
20x washers
10x nuts

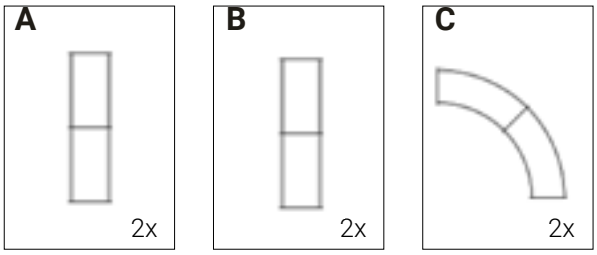

NOTES

Before assembly, check the delivered goods for correctness and completeness.

Please note that the assembly of the rose arch is at your own risk. In the event of improper or incorrect assembly, we do not accept any liability for damage caused thereby.

When assembling, make sure that the crossbars are on the outside.

Please use 1 screw, 2 washers and 1 nut per screw connection. The first washer is placed over the connecting hole under the screw head. The second washer is placed under the hole over the nut.

There are holes on the lower side elements for attaching the rose arch. How you anchor it to the ground depends on your surface. Get advice on this from your local hardware store or specialist shop. Threaded rods are not included in the delivery.

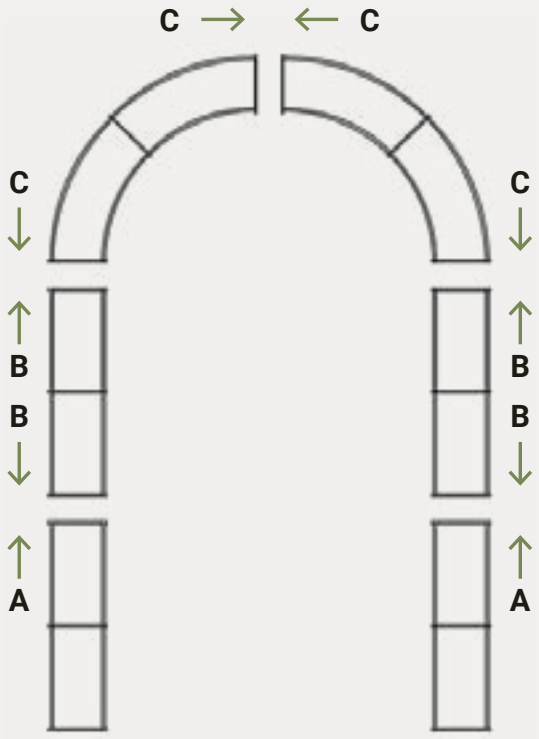

STEP 01

First connect elements A and B to the centre bar using screws.

STEP 02

Now screw elements B and C together.

STEP 03

Close the arc by connecting the elements C to each other.

STEP 04

Set up the arch. Anchor it to the ground with threaded rods.

ELEO GmbH | Ziegeleistraße 14 | 96269 Großheirath (Germany)
+49 9565 – 50 917 0 | www.eleo-garden.co.uk | customerservice@eleo-garden.co.uk
+49 9565 – 50 917 0 | www.eleo-gazebo.co.uk | customerservice@eleo-gazebo.co.uk

06.25