ELEO

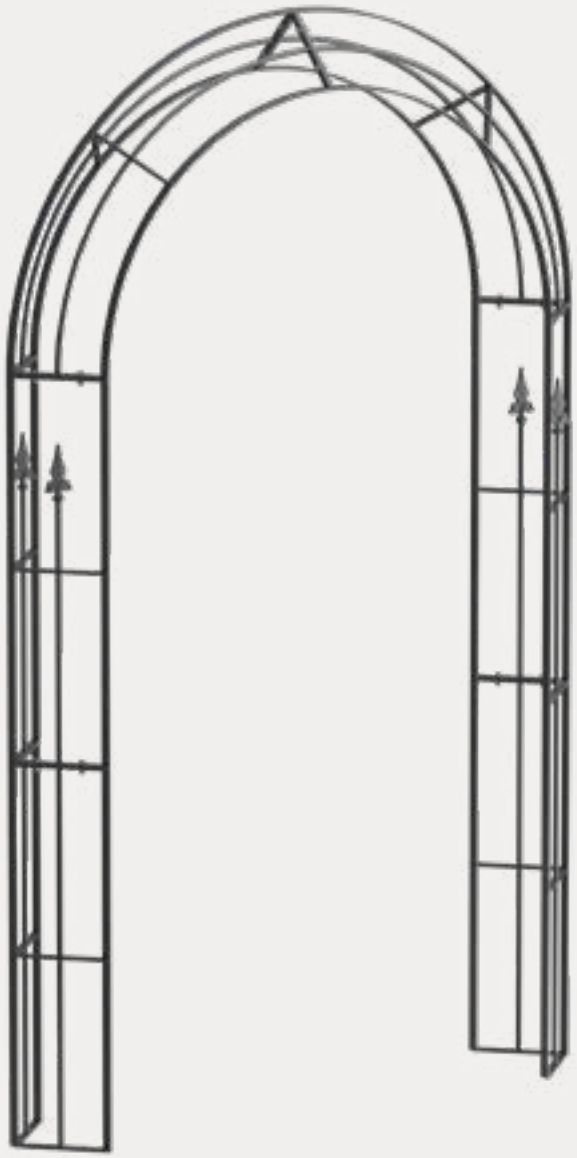

Assembly instructions for the Cosenza rose arch

THANK YOU FOR CHOOSING A ‘COSENZA’ ROSE ARCH FROM ELEO. WE ARE HAPPY TO ASSIST YOU WITH THE FOLLOWING INSTRUCTIONS FOR ASSEMBLING YOUR NEW ROSE ARCH.

What‘s included:

2x elements A ‘bottom’
2x Element B ‘center’
2x Element C ‘top’
20x screws M8 25 mm
40x washers
20x nuts

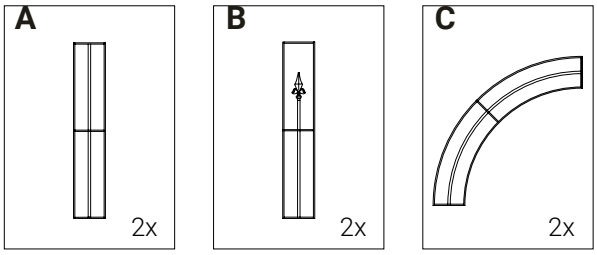

NOTES

Before assembly, check the delivered goods for correctness and completeness.

Please note that the assembly of the rose arch is at your own risk. In the event of improper or incorrect assembly, we do not accept any liability for damage caused thereby.

When assembling, make sure that the cross struts are on the outside.

Please use 1 screw, 2 washers and 1 nut per screw connection. The first washer is placed over the connecting hole under the screw head. The second washer is placed under the hole over the nut.

There are holes on each of the lower side elements for attaching the rose arch. The anchoring in the ground depends on your substrate. Please seek advice on this from your trusted DIY store or specialist retailer. Threaded rods are not included in the scope of delivery.

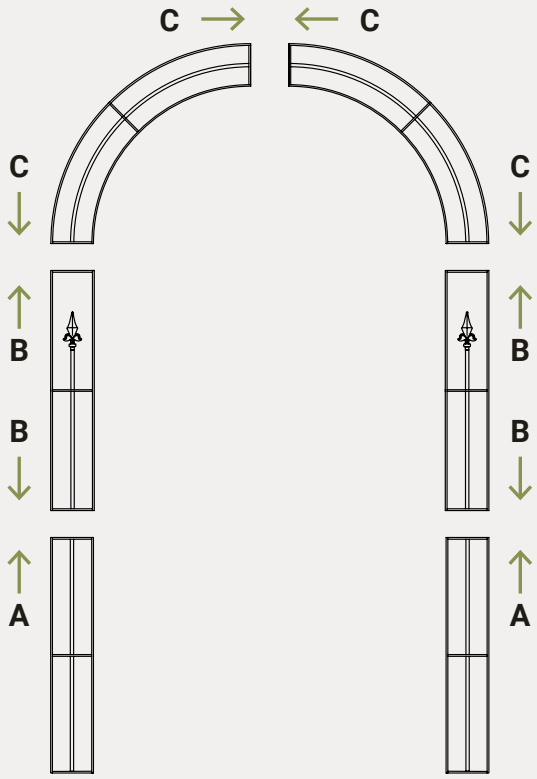

STEP 01
First connect elements A and B to the centre bar using 4 screws each.

STEP 02
Now screw elements B and C together.

STEP 03
Close the arc by connecting the elements C to each other.

STEP 04
Anchor the rose arch to the ground using threaded rods.