ELEO

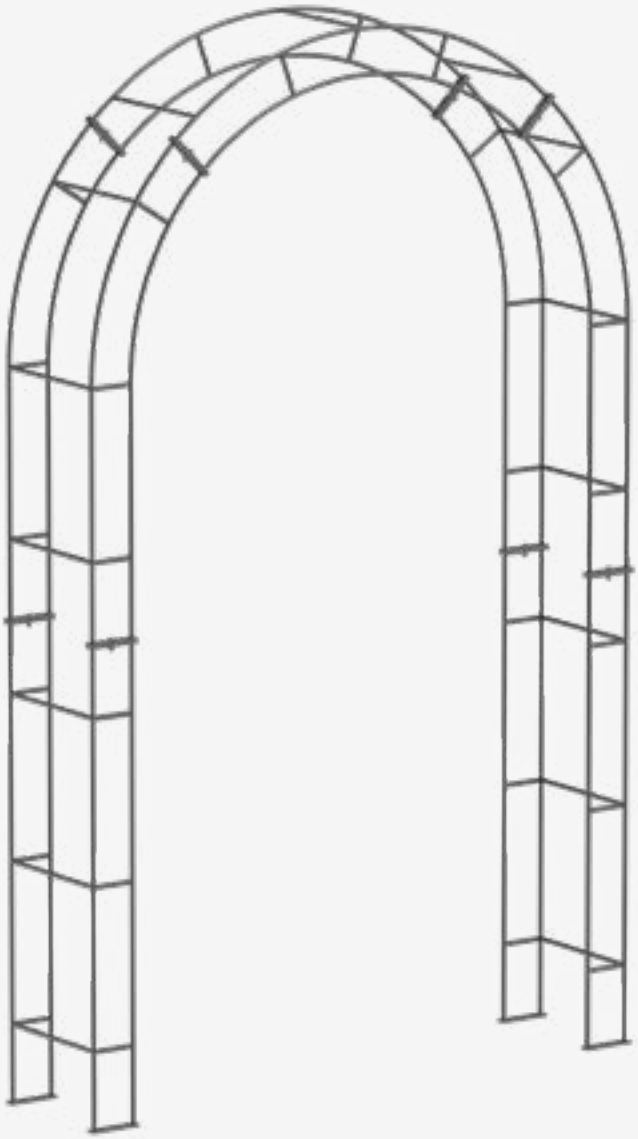

Assembly instructions for Cremona rose arch

Scope of delivery of the freestanding arch:

2x Element A ‘Bottom’
2x Element B ‘Middle’
1x Element C ‘Top’

8x carriage bolts, washers, nuts

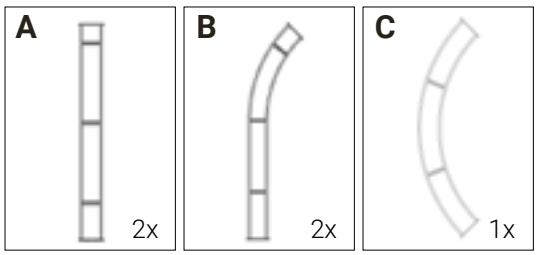

Scope of delivery of the wall mounted arch:

1x Element A ‘Bottom’
1x Element B ‘Middle’
1x Element C ‘Top’
1x Element D ‘End piece’

6x carriage bolts, washers, nuts

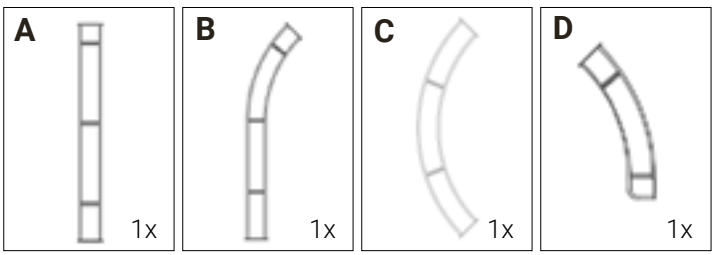

NOTES

Before assembly, check the delivered goods for correctness and completeness. Please note that the assembly of the rose arch is at your own risk. In the event of improper or incorrect assembly, we do not accept any liability for damage caused thereby.

When assembling, make sure that the cross struts are on the outside.

Please use one screw, one washer and one nut per screw connection. The washer is located below the hole above the nut.

There are holes on the lower side elements for attaching the rose arch. How you anchor it to the ground depends on your surface. Get advice on this from your local hardware store or specialist shop. Threaded rods are not included in the delivery.

STEP 01

First, connect elements A and B to the centre bar using two screws.

STEP 02

Now screw elements B and C together.

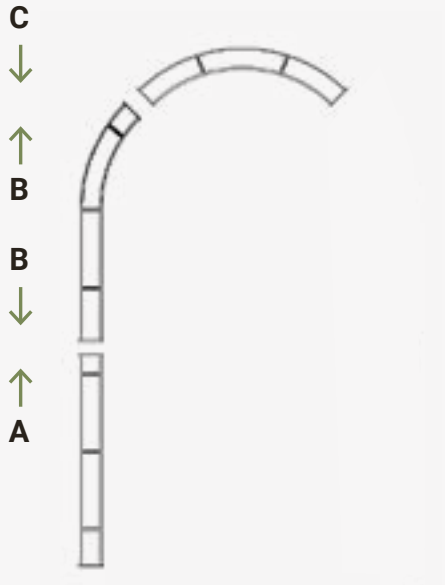

STEP 03
FREE-STANDING ARCH

Repeat steps 01 and 02 for the other side of the rose arch. Connect the second side to the upper element C.

STEP 04
FREE-STANDING ARCH

Anchor the rose arch to the ground with threaded rods. If you have a large garden, you can also use a garden fence to support the rose arch.

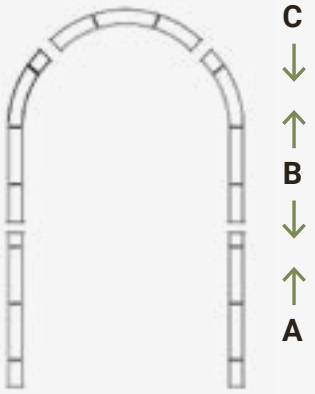

STEP 03
BOW FOR WALL MOUNTING

Close the arc by connecting elements C and D.

STEP 04
BOW FOR WALL MOUNTING

Attach the short side of the arch to the wall. The choice of suitable screws depends on the façade (stone, wood, etc.) to which the rose arch is to be attached. Seek advice from a specialist retailer.

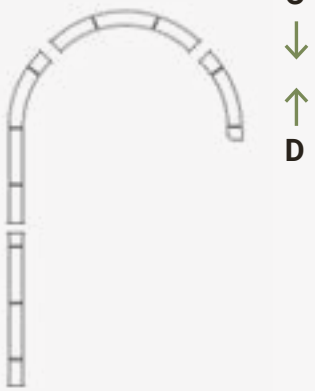

ELEO GmbH | Ziegeleistraße 14 | D-96269 Großheirath
+49 (0) 9565 – 50 917 0 | www.eleo-garden.co.uk | customerservice@eleo-garden.co.uk
+49 (0) 9565 – 50 917 0 | www.eleo-gazebo.co.uk | customerservice@eleo-gazebo.co.uk

0825