ELEO

GAZEBO

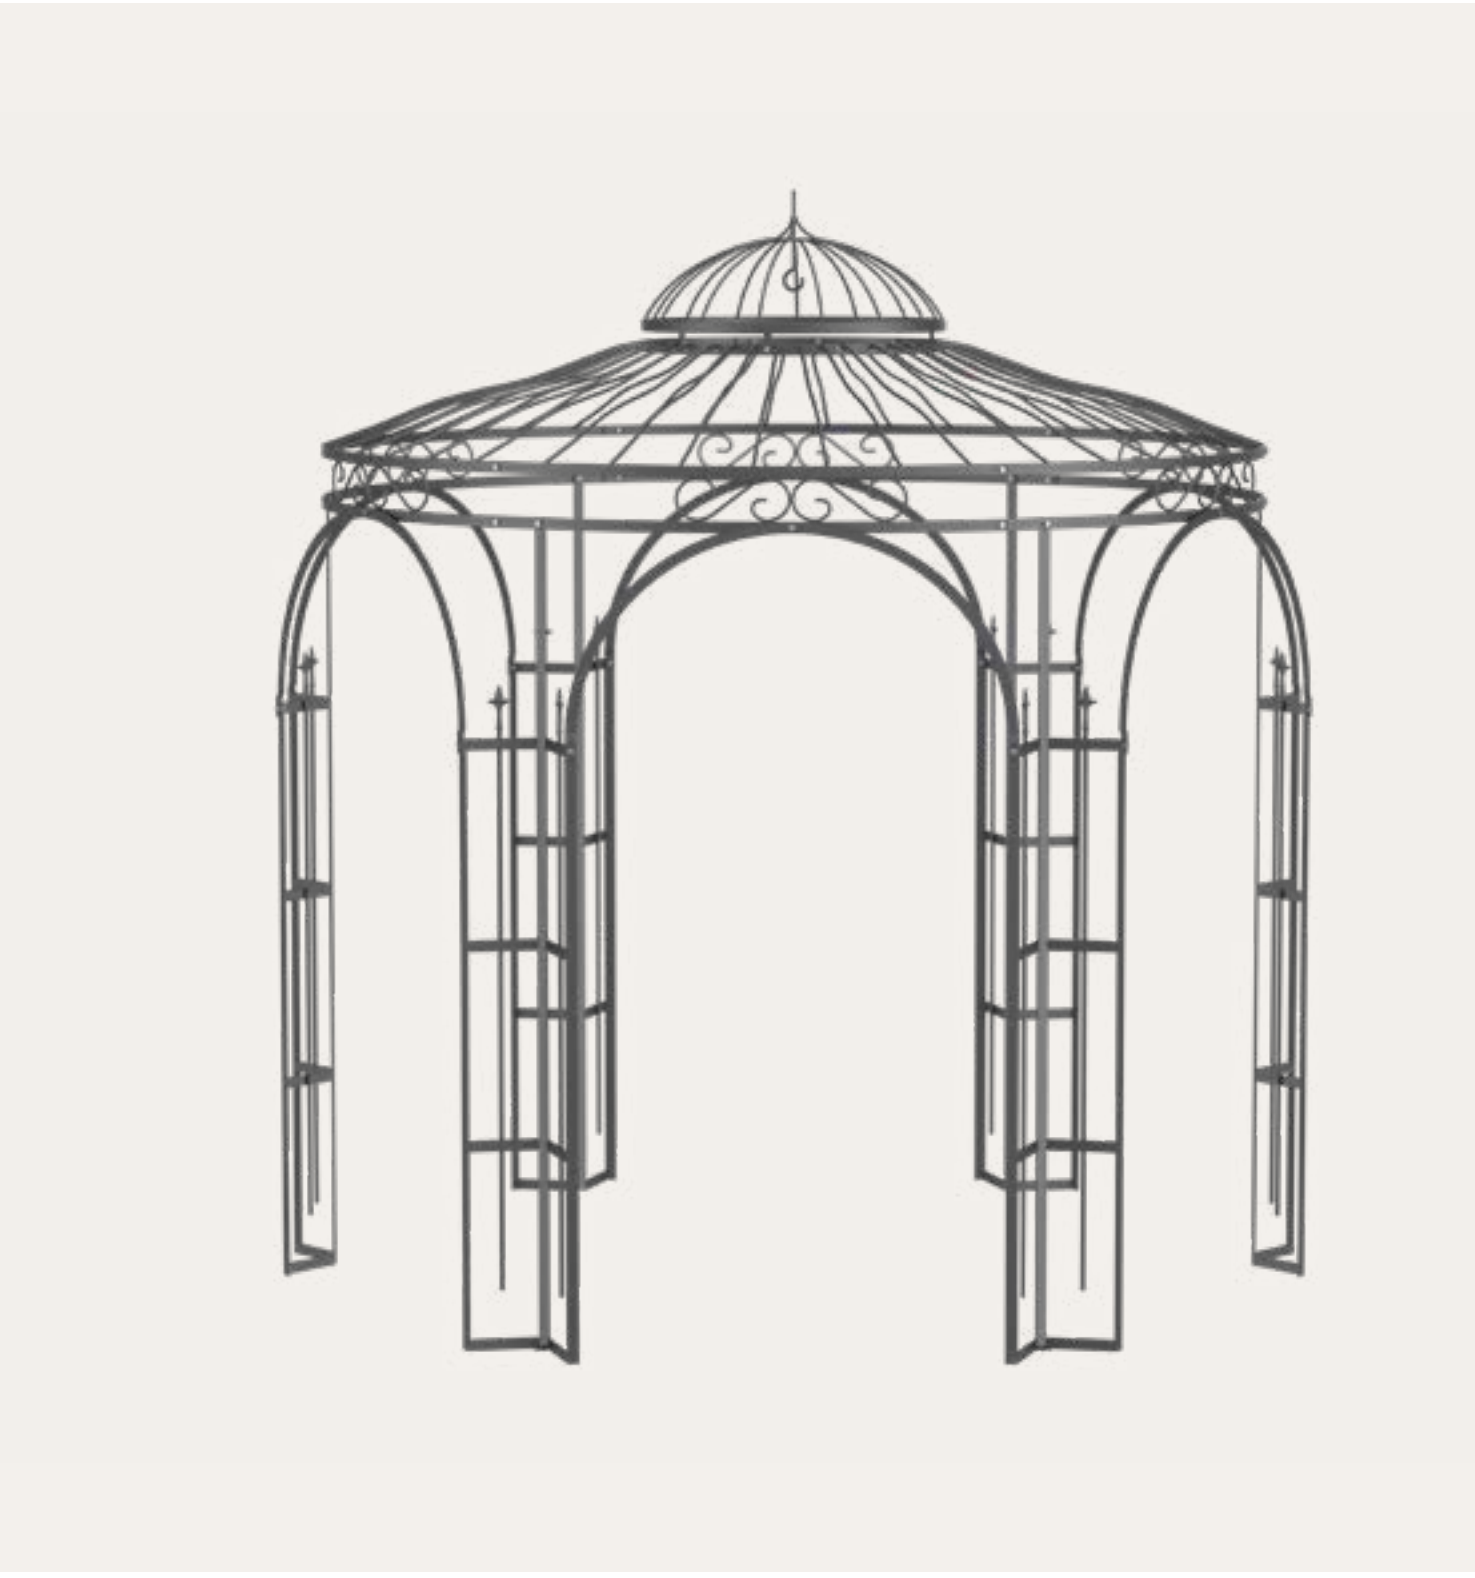

Assembly instructions for the Milano gazebo

FLOOR PLAN

FLORENZ **GAZEBO**

Ø 2,9 m outside

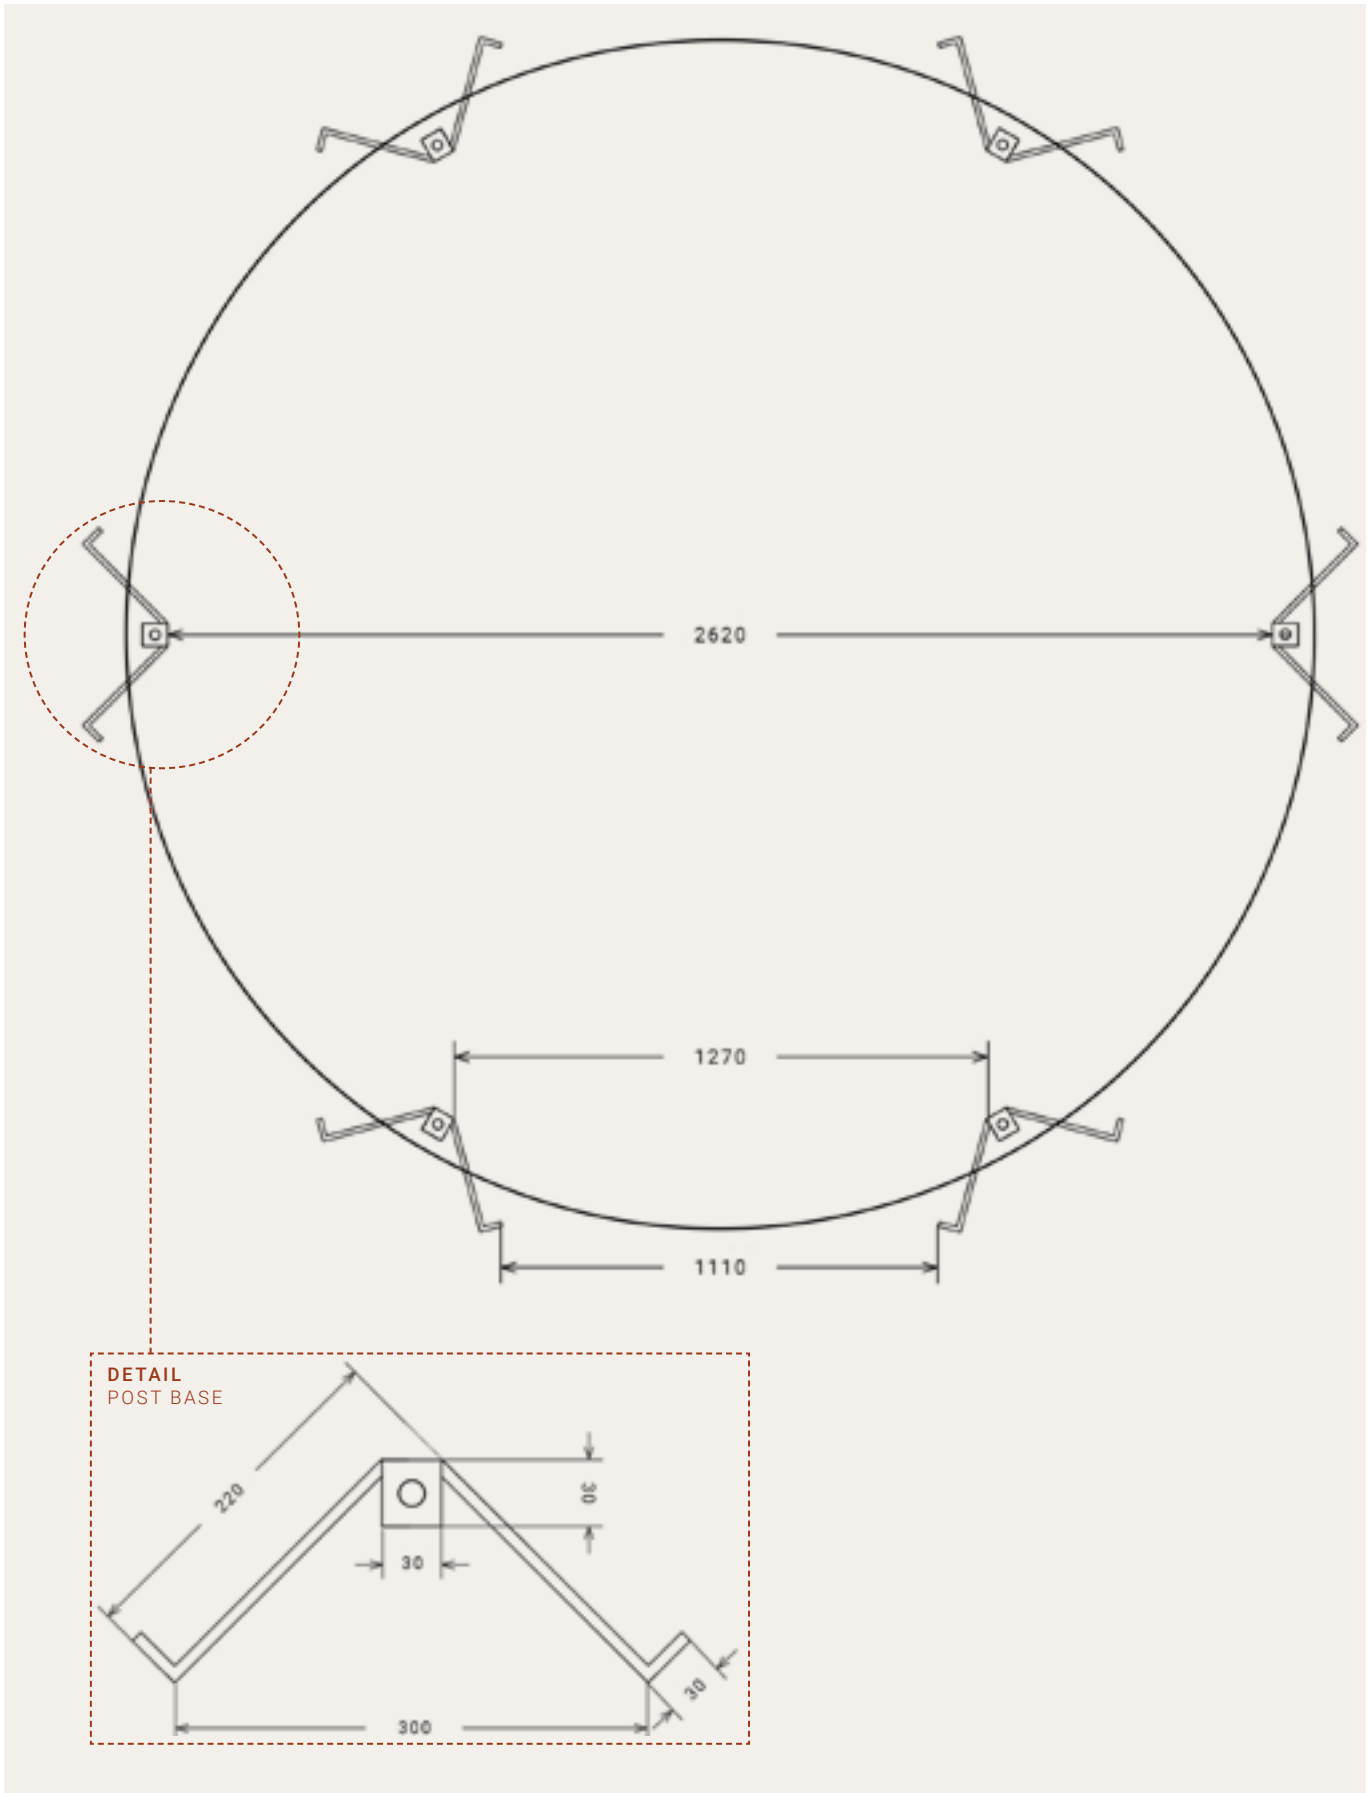

SCALE CA. 1:20 (DIN A4)

DIMENSIONS IN MM

COMPONENTS

A
Stands
6x

B
Flat iron bends
6x

C
Roof compartments with additional drill hole
3x

D
Roof compartments without additional drill hole
3x

E
Dome
1x

INCLUDED FASTENERS

- 45 M8 screws, 25 mm
- 45 washers
- 45 nuts

REQUIRED TOOLS

- 1x step ladder
- 1-2x stool
- 2x 13 mm spanner
- 1-2x spirit levels (magnetic)
- 3 people

SAFETY INSTRUCTIONS

Please note that you assemble the gazebo at your own risk. We do not accept any liability for damage caused by improper or incorrect assembly.

Read the assembly instructions carefully.

Only assemble the gazebo in good weather conditions and wear protective gloves during assembly.

All components are made of wrought iron and are therefore very heavy. Please proceed with caution when assembling the gazebo.

At least 3 people are required to assemble the gazebo safely.

We are happy to advise you on all questions relating to assembly and offer assistance in selecting a suitable service provider.

Our customer service team is available to answer all your questions by telephone on **+49 9565 / 50 917 0** or by email at **customerservice@eleo-gazebo.co.uk** at any time.

PREPARATION AND TIPS

Make sure to set up the gazebo on a flat surface.

Mark a circle with a diameter of 265 cm (approx. 8.69 ft.) on the ground, where you will align the position of the stands. The angle of the stands should touch the circle.

Use one small washer and one large washer per screw connection. The small washer is placed on the outside of the gazebo on the screw head and the large washer is placed on the inside of the nut. The round side of the washers should always face the gazebo components and the angular side should face the screw head or nut.

Unless otherwise specified, the screw head always points outwards.

If you have ordered a decorative ball, attach it to the dome before assembling the gazebo.

STEP
01 SETUP OF THE FIRST ARCH

Set up two stands and connect them with a flat iron bracket. Person 1 and 2 hold the stands in place while person 3 secures the flat iron bracket on the inside. When attaching it to the first stand, person 2 holds the flat iron bracket in position.

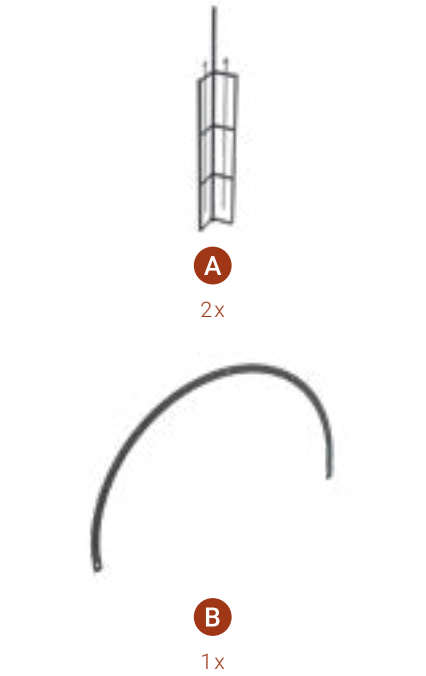

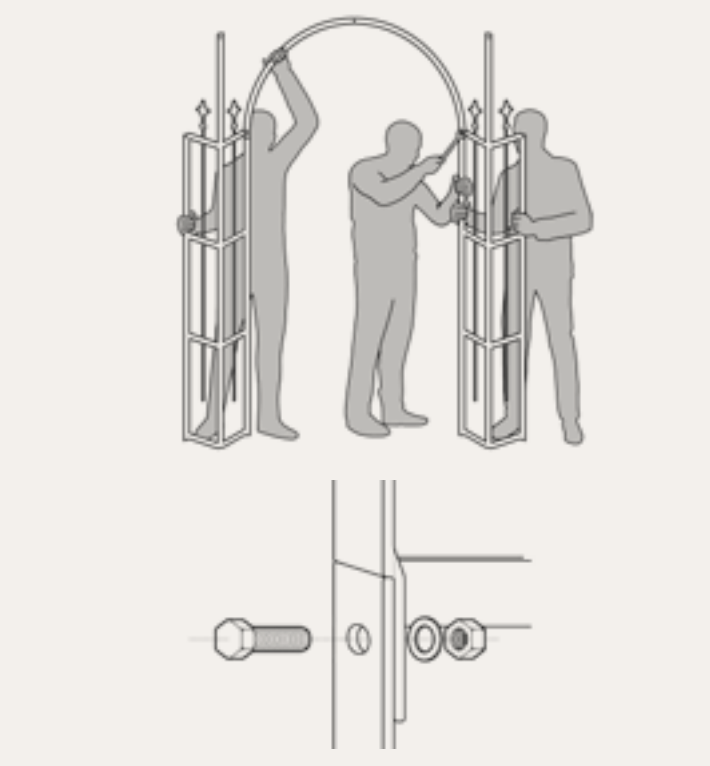

STEP
02 SETUP OF THE REMAINING ARCHES

The remaining stands are assembled clockwise using the flat iron arches. Person 1 always holds the first stand that was set up, person 2 always holds the last stand that was set up, and person 3 brings the flat iron arch to person 2, sets up the next stand and holds it in place. Persons 2 and 3 can take turns screwing the flat iron arch into place.

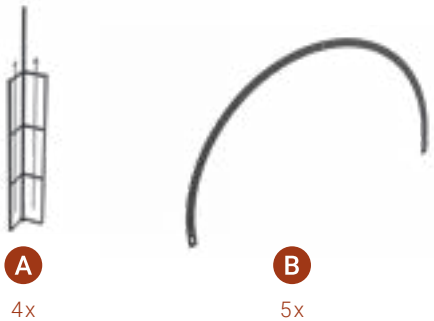

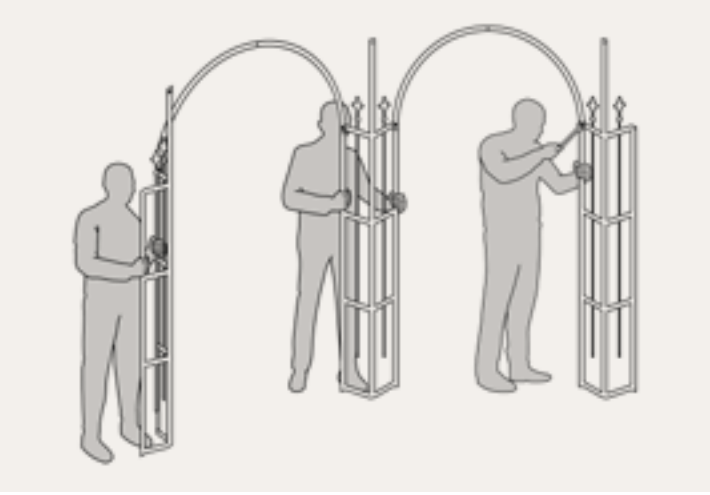

STEP

03 ATTACHING THE FIRST ROOF COMPARTMENT WITH ADDITIONAL HOLE

The roof panel is held at the top by person 1 on a stepladder. Person 2 stands outside the gazebo and holds the roof panel firmly in position. If necessary, person 2 can stand on a stool. Person 3 stands inside the gazebo on a stool and screws the roof fan to the inside of the passageway, initially only hand-tight.

The hole for the flat iron arch is located below the S-decorations and the hole for the stand is positioned accordingly. Person 1 keeps an eye on the screw connection and aligns the roof fan so that it can be attached straight to the passageway.

C
1x

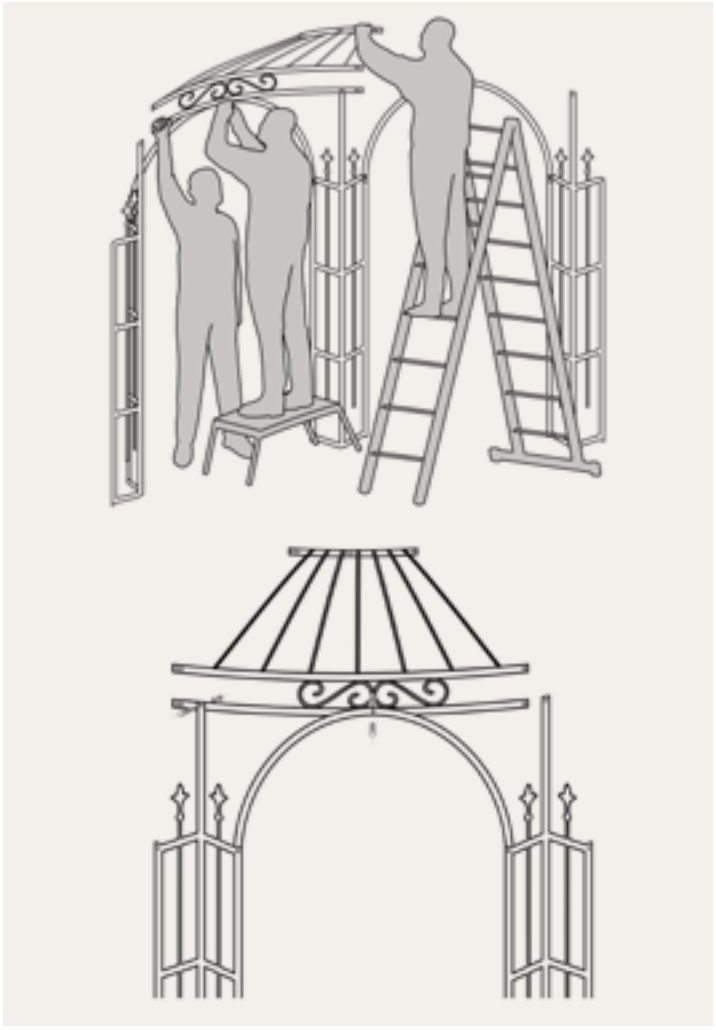

STEP

04 INSTALLING THE SECOND ROOF COMPARTMENT

The remaining roof compartments are installed in a clockwise direction. Next, a roof compartment without an additional drill hole is installed. Person 1 is handed the roof compartment and person 2 connects the roof compartment to the passageway as described in step 3. Person 1 and person 2 then screw the two roof compartments together at the top and bottom, tightening them securely.

D
1x

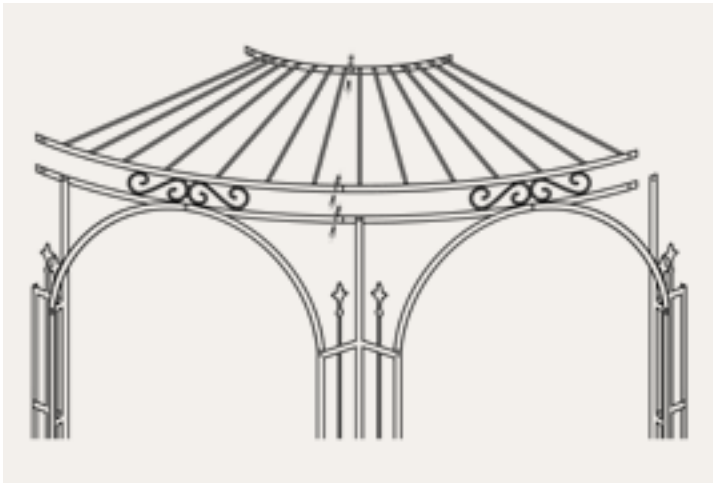

STEP

05 ATTACHING THE NEXT ROOF COMPARTMENTS

Steps 3 and 4 are repeated until the fifth and penultimate roof compartments have been installed. The roof compartments are always installed alternately.

C
2x

D
1x

STEP

06 ATTACHING THE DOME

Person 1 screws the dome to the three tabs on the roof compartments with an additional drill hole, tightening them securely. The screw head should face inwards here.

E
1x

STEP

07 INSTALLING THE LAST ROOF COMPARTMENT

The last roof section is attached as described in the previous steps.

Gradually align the gazebo using spirit levels on the posts and tighten the connections between the respective roof sections and the flat iron arches and posts with a wrench.

D

1 x

ANCHORING IN THE GROUND

How to anchor it in the ground really depends on what's underneath. Get some advice from the trained staff at your local DIY store or specialist shop.

Recommendation for soft ground

Required materials and tools
(not included in delivery)

- 6x M8 threaded rod, (1 m or 0.5 m)
- 6x nuts
- 6x washers
- 8 mm hammer drill bit, alternatively a hammer

For soft ground, such as soil, we recommend using a threaded rod with a length of 1 m. Place a small washer and nut on the head of the threaded rod and hammer the threaded rod through the hole in the stand base into the ground at a slight angle.

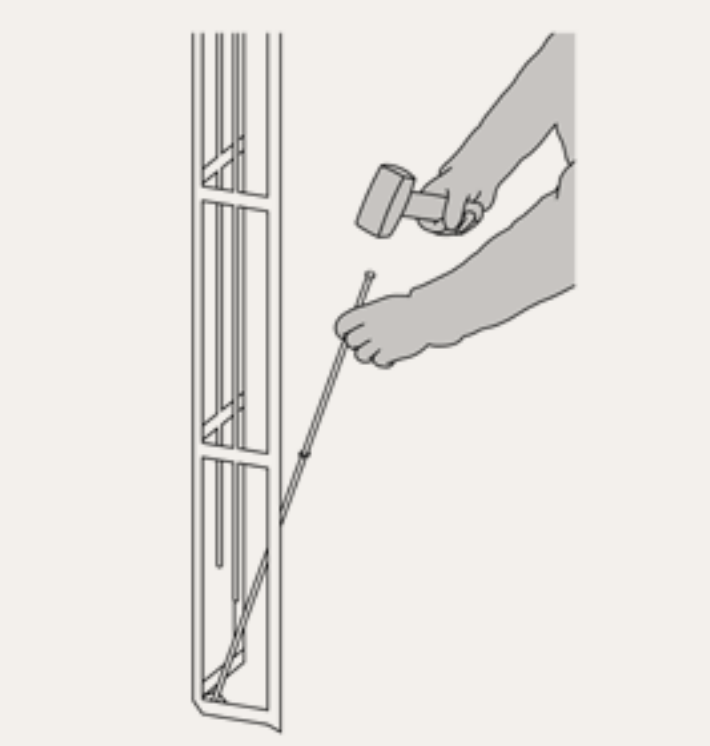

ASSEMBLY
ADDITIONAL ACCESSORIES

INSTALLATION
SHADE SAIL

First attach the shade sail to the hook on the dome.

Then attach the shade sail to the lower ring of the roof using the cord provided. The cord should be attached from the 'inside bottom' to the 'outside top'.

Make sure that the shade sail is stretched taut.

INSTALLATION
TRELLIS

Place two wooden blocks of equal size and approx. 5 cm (approx. 1.96 in.) high in the middle of the passageway where the trellis is to be attached. Use the wooden blocks as supports for the trellis. Hang the trellis in the designated anchorage.

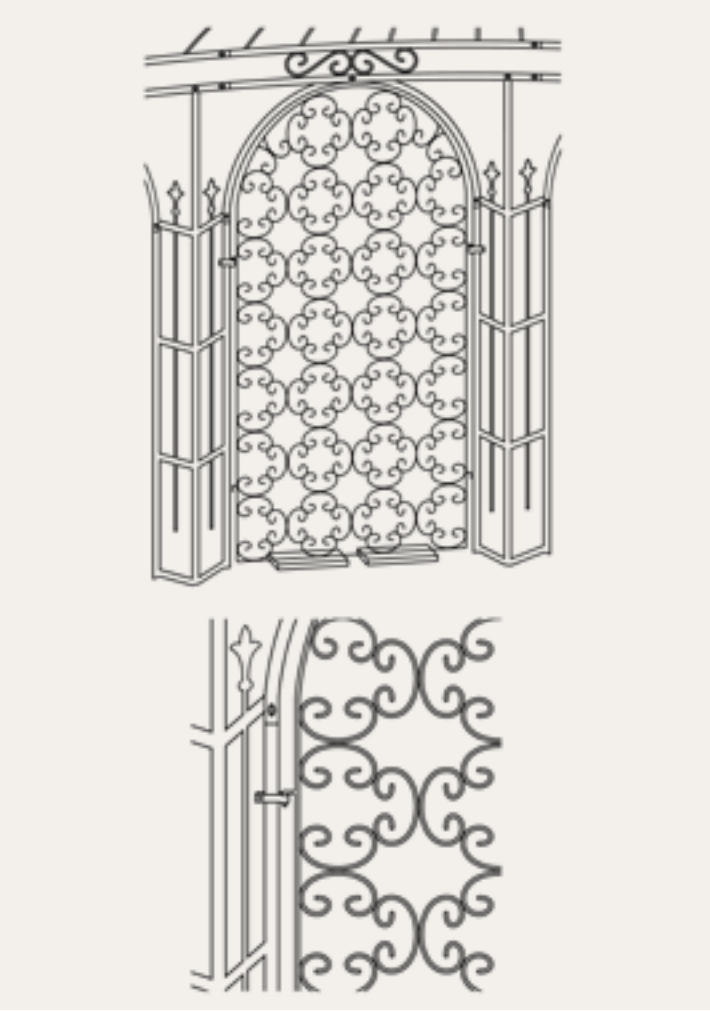

INSTALLATION

CURTAINS

The scope of delivery includes brackets for mounting the curtains. Attach these to the flat iron arches using 35 mm long screws.

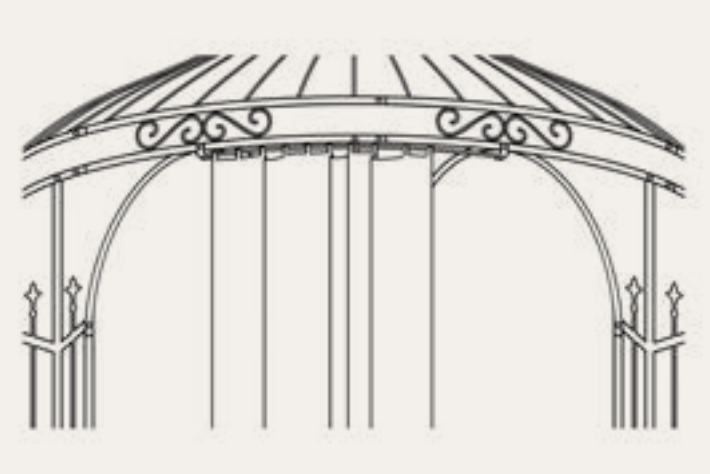

We hope you enjoy your new gazebo!

ELEO
GAZEBO

Website | E-Mail
www.eleo-gazebo.co.uk
customerservice@eleo-gazebo.co.uk

Phone
+49 9565 – 50 917 0
Mo. – Fr. 8 am – 3 pm

Address
ELEO GmbH
Ziegeleistraße 14
96269 Großheirath (Germany)