ELEO
GAZEBO

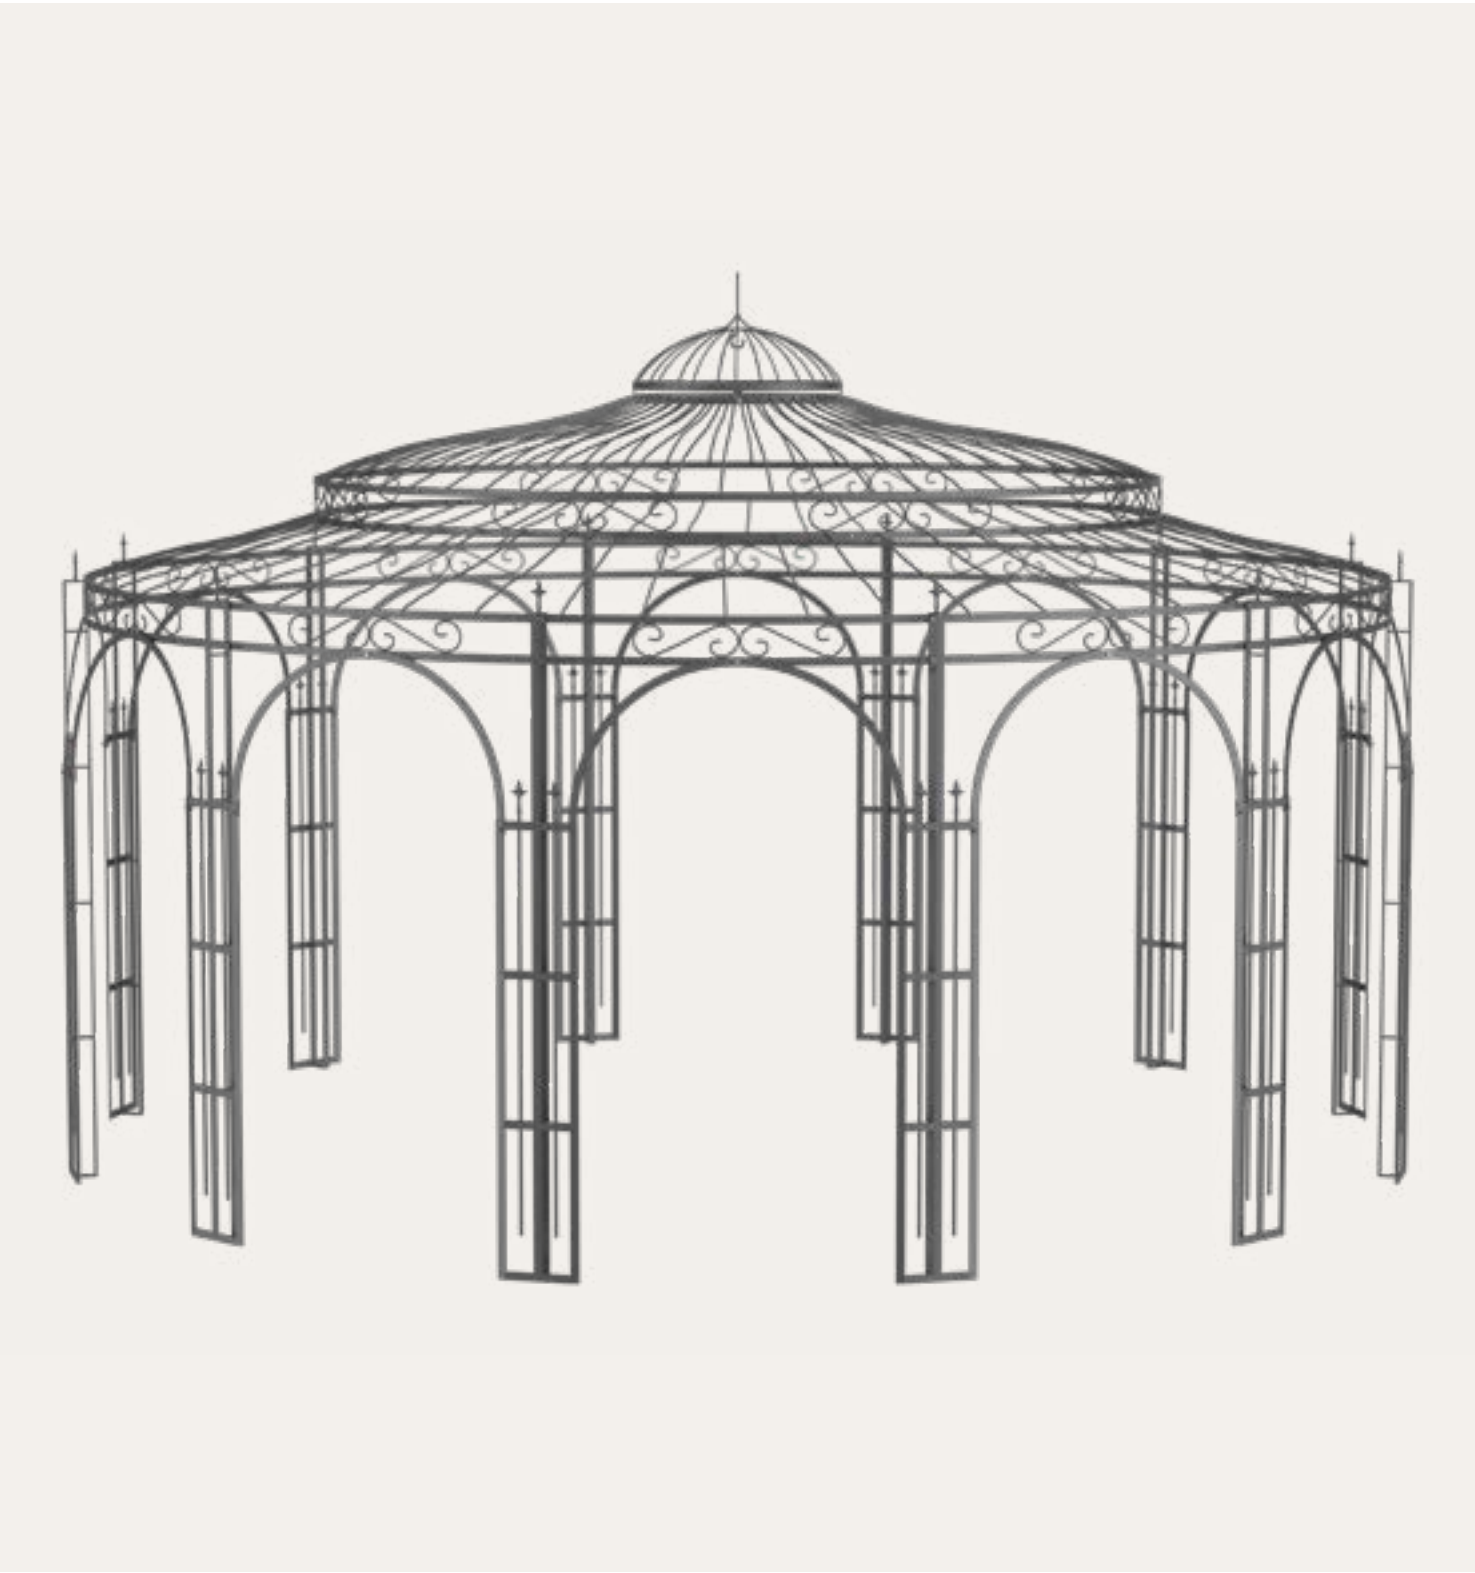

Assembly instructions for the Toscana gazebo

FLOOR PLAN

TOSCANA **GAZEBO**

Ø 5,5 m outside

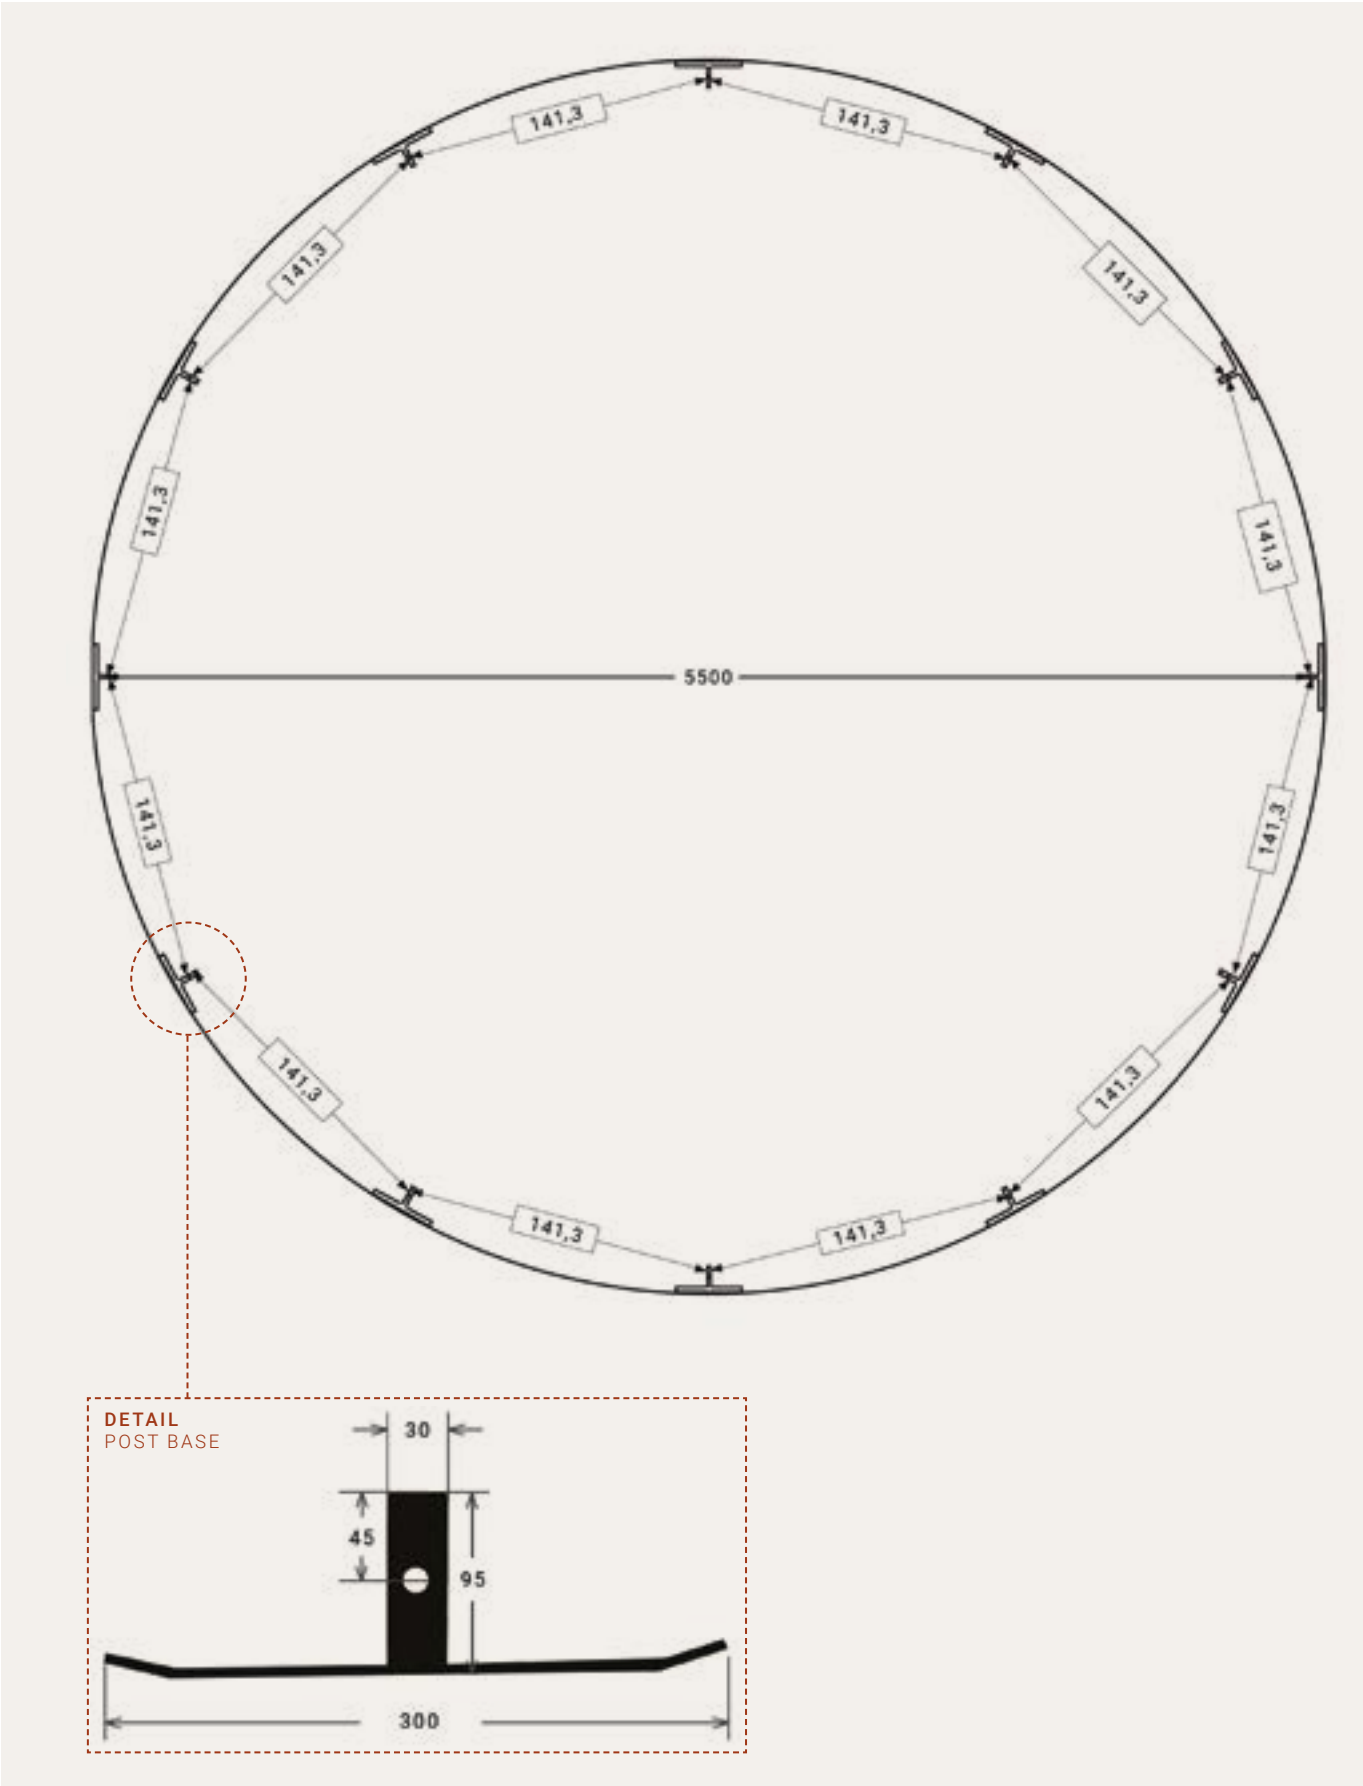

SCALE CA. 1:20 (DIN A4)

DIMENSIONS IN MM

COMPONENTS

A
Stands
12x

B
Flat iron bends
12x

C
Lower roof compartments with 1 notch
2x

D
Lower roof compartments with 2 notches
2x

E
Lower roof compartments with 3 notches
2x

F
Upper roof compartments with 1 notch
2x

G
Upper roof compartments with 2 notches
2x

H
Dome
1x

INCLUDED FASTENERS

- 105 M10 screws, 25 mm
- 4 M10 screws, 35 mm
- 218 washers (not for uncoated)
- 109 nuts

REQUIRED TOOLS

- 3-4x step ladders
- 1 stool
- 2x 17 mm spanner
- safety gloves
- 1-2x spirit levels (magnetic)
- 4 people

SAFETY INSTRUCTIONS

Please note that you assemble the gazebo at your own risk. We do not accept any liability for damage caused by improper or incorrect assembly.

Read the assembly instructions carefully.

Only assemble the gazebo in good weather conditions and wear protective gloves during assembly.

All components are made of wrought iron and are therefore very heavy. Please proceed with caution when assembling the gazebo.

At least 4 people are required to assemble the gazebo safely.

We are happy to advise you on all questions relating to assembly and offer assistance in selecting a suitable service provider.

Our customer service team is available to answer all your questions by telephone on **+49 9565 / 50 917 0** or by email at **customerservice@eleo-gazebo.co.uk** at any time.

PREPARATION AND TIPS

Ensure that the gazebo is erected on a level surface.

The long side of the stands points outwards

All roof compartments have notches on the second ring that can be used to distinguish them.

Always use 2 washers per screw connection - on the screw head and on the nut. The round side of the washer should always point towards the gazebo components and the angular side towards the screw head or nut.

Unless otherwise specified, the screw head always faces outwards.

If you have also ordered a decorative ball, attach it to the dome before assembling the gazebo.

STEP
01 SETUP OF THE FIRST ARCH

Set up two stands and connect them together using a flat iron arch.

Persons 1 and 2 hold the uprights firmly, while person 3 fastens the flat iron arch on the inside with a spanner. When attaching to the first upright, person 2 also holds the flat iron arch in position.

A
2x

B
1x

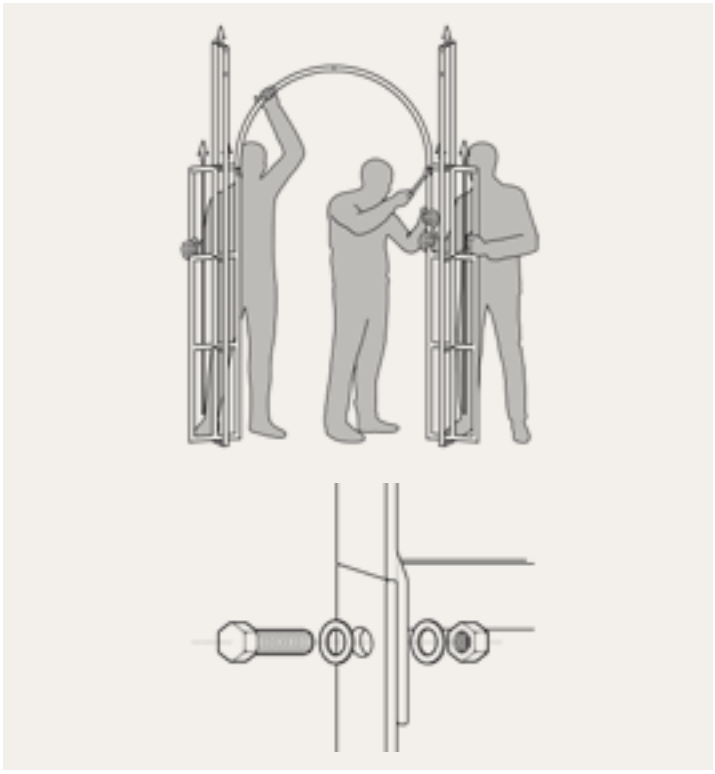

STEP
02 SETUP OF THE REMAINING ARCHES

The remaining stands are erected clockwise with the flat iron arches. Person 1 always holds the first stand erected, person 2 always holds the last stand erected and person 3 brings the flat iron arch to person 2 and erects and holds the next stand. Persons 2 and 3 can take it in turns to screw the flat iron arch in place.

A
10x

B
11x

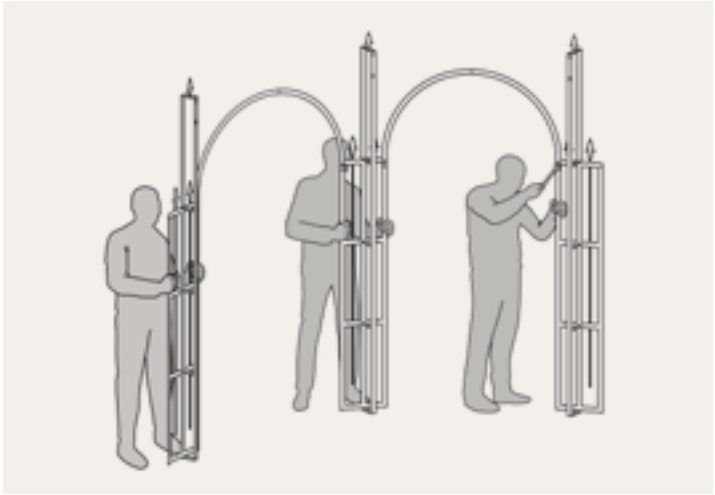

STEP

03 ATTACHING THE FIRST LOWER ROOF FAN (1 NOTCH)

First, a lower roof fan with a notch is fitted. The roof fan is held at the upper end by person 1 on a ladder frame. Person 2 and person 3 hold the roof fan on ladders at the sides. Person 4 stands inside the gazebo on a stool or a stepladder and screws the roof fan to the inside of the passageway. The screws on the uprights should initially only be hand-tightened. The holes for the flat iron arches are located underneath the S-shaped decorations and the holes for the uprights are made accordingly. Person 1 keeps an eye on the screw connection and aligns the roof fan so that it can be attached straight to the passageway.

C
1x

STEP

04 ATTACHING THE OTHER ROOF COMPARTMENTS

The other lower roof compartments are assembled in a clockwise direction again. Next, a roof fan with 2 notches is attached. Person 1 holds the roof fan in the centre and persons 2 and 3 hold the outer sides of the roof fan. Person 4 connects the roof fan to the passageway as described in step 3. Person 4 then screws the two roof compartments together at the bottom so that they are wrench-tight.

The other roof compartments are then fitted as described in steps 3 and 4. The roof compartment with two notches is followed by a roof compartment with three notches. This is followed by another roof compartment with one notch, then two notches and finally another with three notches. Once all the lower roof compartments have been fitted, align the uprights one by one using spirit levels and tighten all the connections between the roof compartment and the uprights. All connections should now be wrench-tight.



1x C 2x D 3x E

STEP

05 ATTACHING THE UPPER ROOF COMPARTMENTS

The upper roof compartments are attached in a similar way to step 3 and step 4. The first upper roof fan has a notch and is attached where a lower roof fan with one notch meets a lower roof fan with two notches. The outermost two holes on the lower ring of the roof fan are screwed to the outer holes of the lower roof fan with one and two notches. The remaining connections are made accordingly.

Please note that the outermost hole of the upper roof compartments is always connected to the neighbouring upper roof compartments. Three crossbars therefore meet at the lower ring for this connection. The larger M8 35 mm screw must always be used here.

The roof compartment with one notch is followed clockwise by a roof compartment with two notches and then another roof compartment with one notch.

2x F

1x G

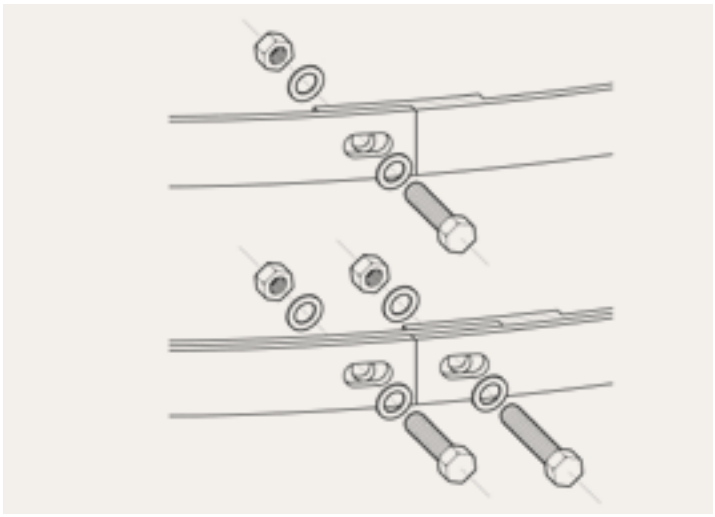

STEP

06 ATTACHING THE DOME

H

1x

Person 1 screws the dome to the four lugs with the upper roof compartments using a spanner. The screw head should point inwards here.

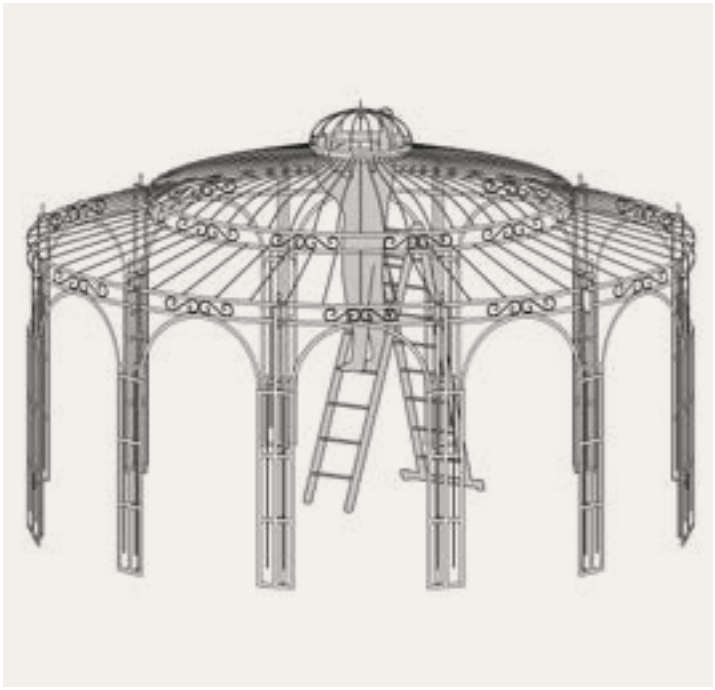

STEP

07 ATTACHING THE LAST ROOF FAN

The last roof fan with two notches is attached as described in the previous steps.

G

1 x

VERANKERUNG IM BODEN

How to anchor it in the ground really depends on what's underneath. Get some advice from the trained staff at your local DIY store or specialist shop.

Recommendation for soft ground

Required materials and tools
(not included in delivery)

- 12x M8 threaded rod, 1 m
- 12x nuts
- 12x washers
- 8 mm hammer drill bit, alternatively a hammer

For soft ground, such as soil, we recommend using a threaded rod with a length of 1 m (approx. 3.28 ft.). Place a small washer and nut on the head of the threaded rod and hammer the threaded rod through the hole in the stand base into the ground at a slight angle.

ASSEMBLY
ADDITIONAL ACCESSORIES

INSTALLATION
SHADE SAIL

First attach the shade sail to the hook on the dome.

Then attach the shade sail to the lower ring of the roof using the cord provided. The cord should be attached from the 'inside bottom' to the 'outside top'.

Make sure that the shade sail is stretched taut.

INSTALLATION
TRELLIS

Place two wooden blocks of equal size and approx. 5 cm (approx. 1.97 in.) high in the middle of the passageway where the trellis is to be attached. Use the wooden blocks as supports for the trellis. Hang the trellis in the designated anchorage.

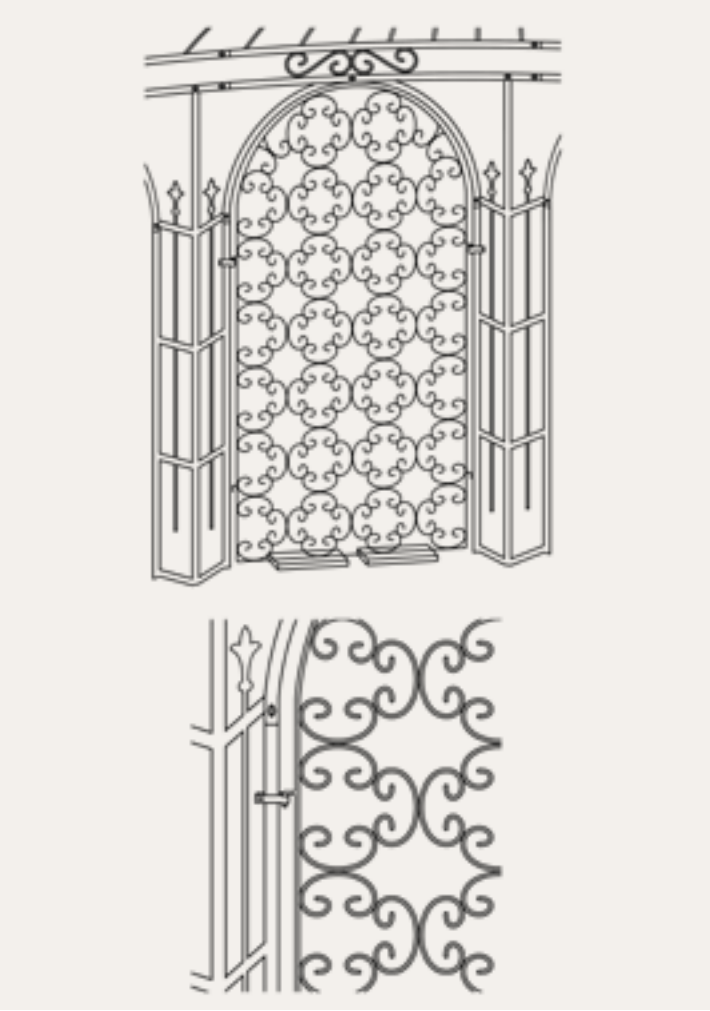

INSTALLATION

CURTAINS

The scope of delivery includes brackets for mounting the curtains. Attach these to the flat iron arches using 35 mm long screws.

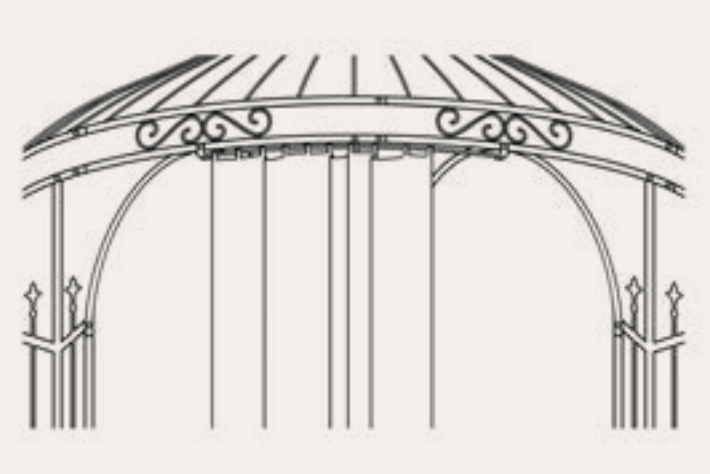

We hope you enjoy your new gazebo!

ELEO
GAZEBO

Website | E-Mail
www.eleo-gazebo.co.uk
customerservice@eleo-gazebo.co.uk

Phone
+49 9565 – 50 917 0
Mo. – Fr. 8 am – 3 pm

Address
ELEO GmbH
Ziegeleistraße 14
96269 Großheirath (Germany)