ELEO

GAZEBO

UNCOATED

Assembly instructions for the Firenze Gazebo

FLOOR PLAN

FIRENZE **GAZEBO**

Ø 3,7 m (approx. 12.1 ft.) outside

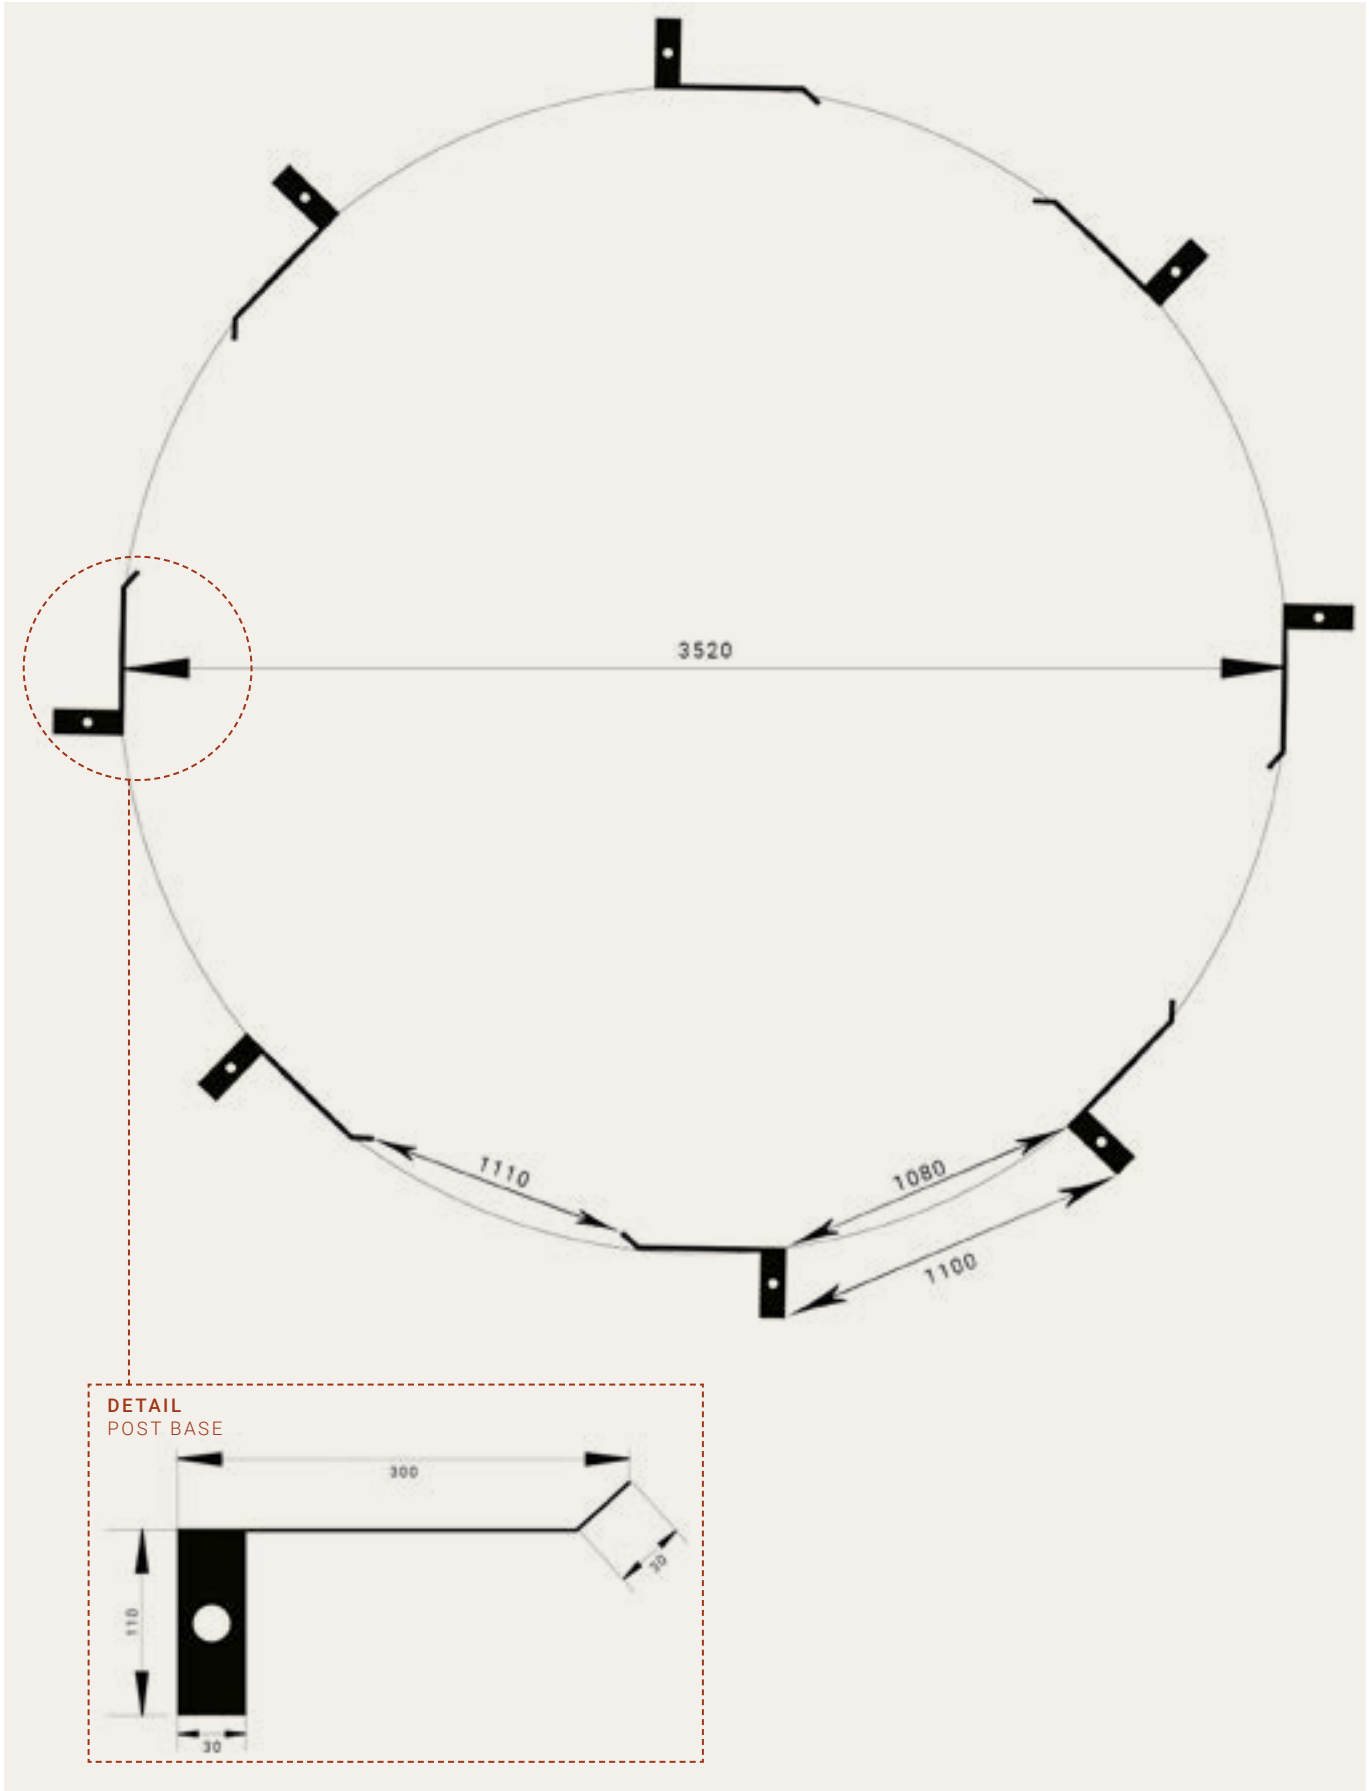

SCALE CA. 1:20 (DIN A4)

DIMENSIONS IN MM

COMPONENTS

A
Stands left-winged
4x

B
Stands right-winged
4x

C
Flat iron bends
8x

D
Roof compartments with additional drill hole
4x

Dome

E
Roof compartments without additional drill hole
4x

F
Dome
1x

INCLUDED FASTENERS

- 60 M10 screws, 25 mm
- 60 nuts

REQUIRED TOOLS

- 1x step ladder
- 1-2x stool
- 2x 17 mm spanner
- safety gloves
- 1-2x spirit levels (magnetic)
- 3 people

SAFETY INSTRUCTIONS

Please note that you assemble the gazebo at your own risk. We do not accept any liability for damage caused by improper or incorrect assembly.

Read the assembly instructions carefully.

Only assemble the gazebo in good weather conditions and wear protective gloves during assembly.

All components are made of wrought iron and are therefore very heavy. Please proceed with caution when assembling the gazebo.

At least 3 people are required to assemble the gazebo safely.

We are happy to advise you on all questions relating to assembly and offer assistance in selecting a suitable service provider.

Our customer service team is available to answer all your questions by telephone on **+49 9565 / 50 917 0** or by email at **customerservice@eleo-gazebo.co.uk** at any time.

PREPARATION AND TIPS

Make sure to set up the gazebo on a flat surface.

Mark a circle with a diameter of 350 cm (approx. 11.4 ft.) on the ground, where you will align the position of the stands. The angle of the stands should touch the circle.

Use one small washer and one large washer per screw connection. The small washer is placed on the outside of the gazebo on the screw head and the large washer is placed on the inside of the nut. The round side of the washers should always face the gazebo components and the angular side should face the screw head or nut.

Unless otherwise specified, the screw head always points outwards.

If you have ordered a decorative ball, attach it to the dome before assembling the gazebo.

STEP

01 SETUP OF THE FIRST ARCH

Set up a right-winged and a left-winged stand and connect the two with a flat iron arch. The long sides point outwards. Persons 1 and 2 hold the stands firmly, while person 3 fastens the flat bar bend on the outside with a spanner. When attaching to the first stand, person 2 also holds the flat iron arch in position.

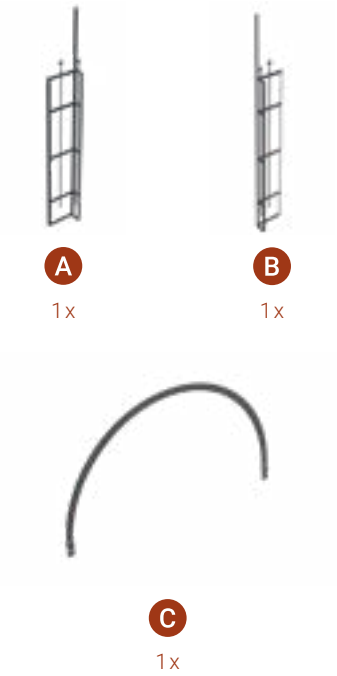

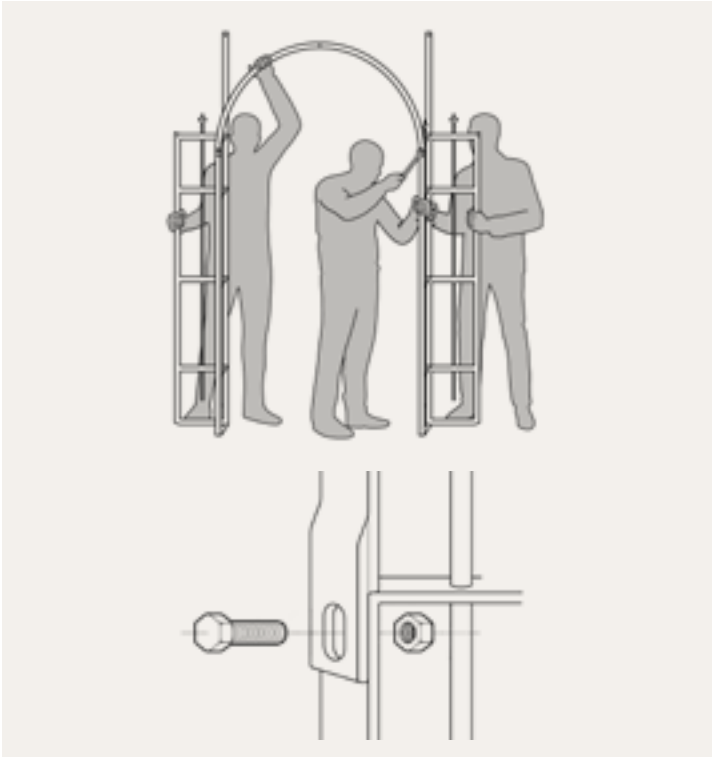

STEP

02 SETUP OF THE REMAINING ARCHES

The remaining stands are assembled clockwise with the flat iron arches. The stands alternate. Person 1 always holds on to the first stand set up, person 2 always holds on to the last stand set up and person 3 brings the flat iron arch to person 2 and erects the next stand and holds on to it. Persons 2 and 3 can take it in turns to screw the flat iron arch in place.

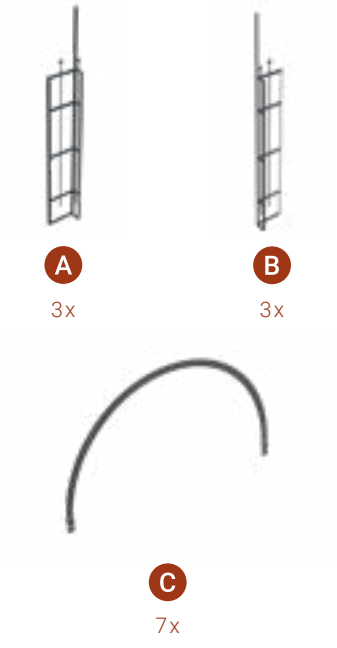

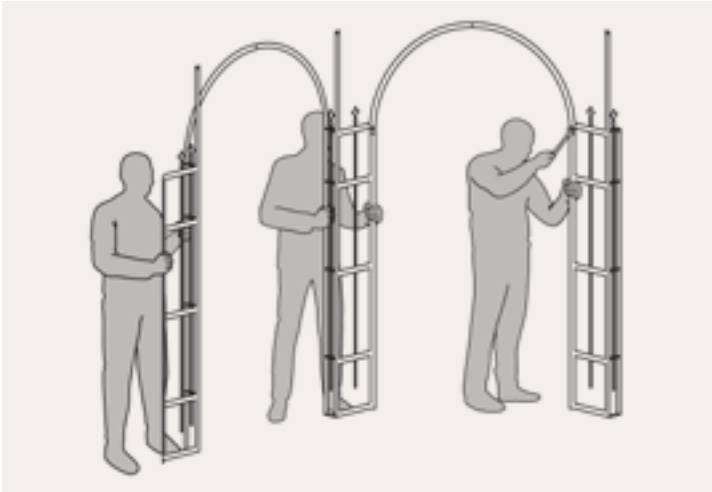

STEP

03 ATTACHING THE FIRST ROOF COMPARTMENT WITH ADDITIONAL HOLE

The roof fan is held at the top end by person 1 on a ladder. Person 2 stands outside the gazebo and holds the roof fan firmly and in position. If necessary, person 2 can stand on a stool. Person 3 stands on a stool inside the gazebo and screws the roof fan to the inside of the passageway, initially only hand-tight.

The hole for the flat iron arch is located underneath the S-shaped decorations and the holes for the two stands are made accordingly. Person 1 keeps an eye on the screw connection and aligns the roof fan so that it can be attached straight to the passageway.

D
1x

STEP

04 INSTALLING THE SECOND ROOF COMPARTMENT

The remaining roof compartments are installed in a clockwise direction. Next, a roof compartment without an additional drill hole is installed. Person 1 is handed the roof compartment and person 2 connects the roof compartment to the passageway as described in step 3. Person 1 and person 2 then screw the two roof compartments together at the top and bottom, tightening them securely.

E
1x

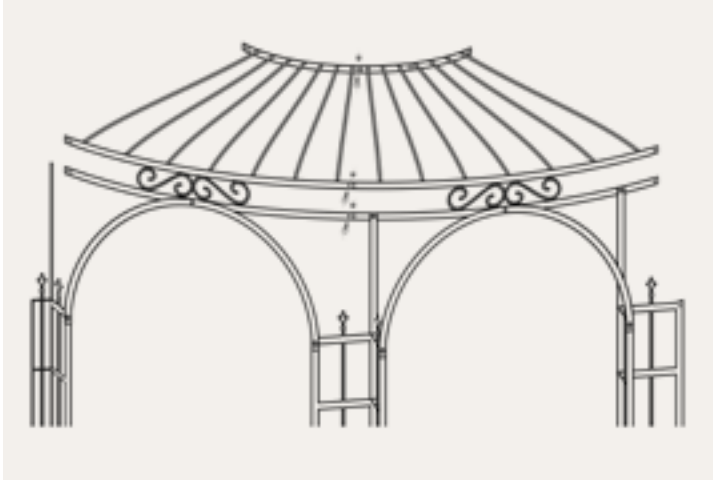

STEP

05 ATTACHING THE NEXT ROOF COMPARTMENTS

Steps 3 and 4 are repeated until the seventh and penultimate roof compartments have been installed. The roof compartments are always installed alternately.

D

3x

E

2x

STEP

06 ATTACHING THE DOME

Person 1 screws the dome to the three tabs on the roof compartments with an additional drill hole, tightening them securely. The screw head should face inwards here.

F

1x

STEP

07 INSTALLING THE LAST ROOF COMPARTMENT

The last roof section is attached as described in the previous steps.

Gradually align the gazebo using spirit levels on the posts and tighten the connections between the respective roof sections and the flat iron arches and posts with a wrench.

E

1 x

ANCHORING IN THE GROUND

How to anchor it in the ground really depends on what's underneath. Get some advice from the trained staff at your local DIY store or specialist shop.

Recommendation for soft ground

Required materials and tools (not included in delivery)

- 8x M8 threaded rod, 1 m
- 8x nuts
- 8x washers
- 8 mm hammer drill bit, alternatively a hammer

For soft ground, such as soil, we recommend using a threaded rod with a length of 1 m (approx. 40 in.). Place a small washer and nut on the head of the threaded rod and hammer the threaded rod through the hole in the stand base into the ground at a slight angle.

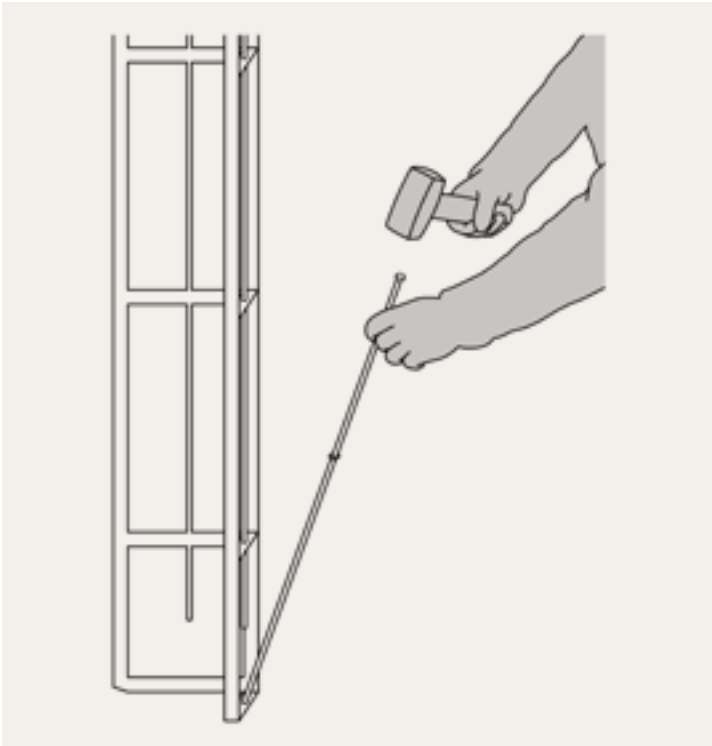

ASSEMBLY
ADDITIONAL ACCESSORIES

INSTALLATION
SHADE SAIL

First attach the shade sail to the hook on the dome.

Then attach the shade sail to the lower ring of the roof using the cord provided. The cord should be attached from the 'inside bottom' to the 'outside top'.

Make sure that the shade sail is stretched taut.

INSTALLATION
TRELLIS

Place two wooden blocks of equal size and 5 cm (approx. 2 in.) high in the middle of the passageway where the trellis is to be attached. Use the wooden blocks as supports for the trellis. Hang the trellis in the designated anchorage.

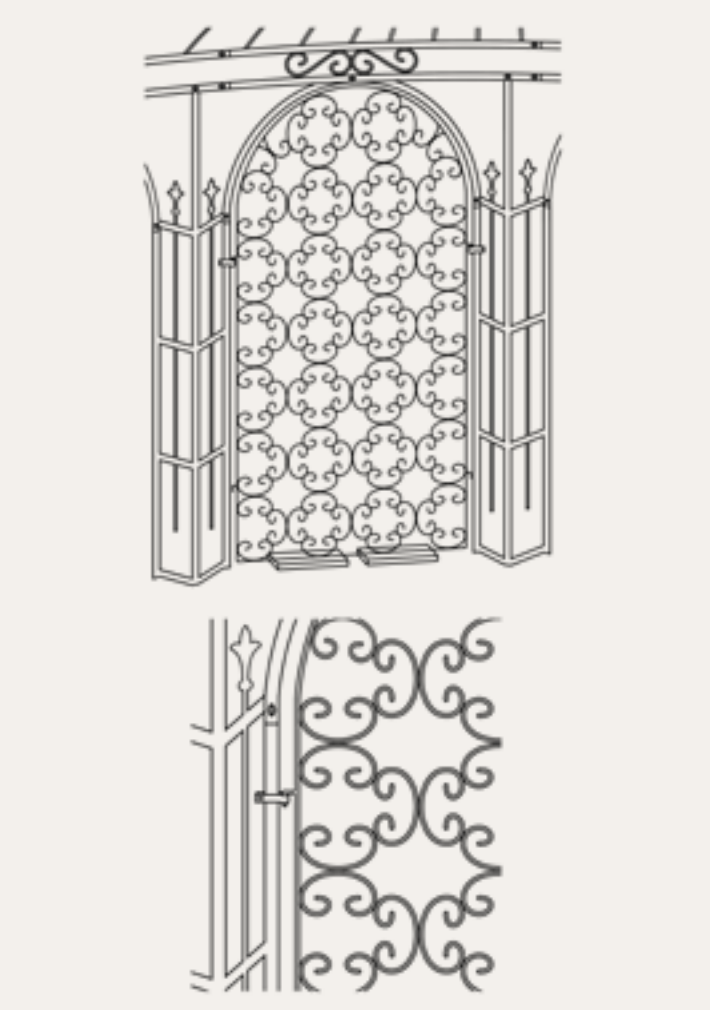

INSTALLATION

CURTAINS

The scope of delivery includes brackets for mounting the curtains. Attach these to the flat iron arches using 35 mm long screws.

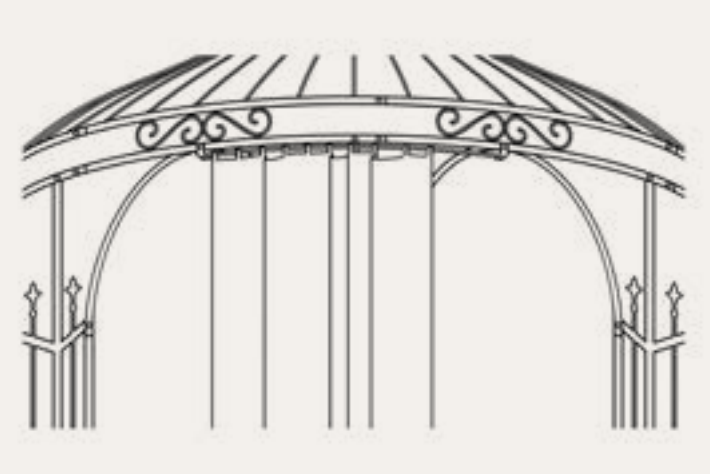

We hope you enjoy
your new gazebo!

ELEO
GAZEBO

Website | E-Mail
www.eleo-gazebo.co.uk
customerservice@eleo-gazebo.co.uk

Phone
+49 9565 – 50 917 0
Mo. – Fr. 8 am – 3 pm

Address
ELEO GmbH
Ziegeleistraße 14
96269 Großheirath (Germany)